


GENERAL NOTES

1. EXTEND 2" NUT TO WITHIN 5-FEET OF FINISH GRADE WHEN VALVE NUT IS DEEPER THAN 6-FEET FROM FINISH GRADE
2. WHERE LENGTH OF EXTENSION IS OVER 6-FEET, A SECOND PLATE SHALL BE INSTALLED IN THE CENTER OF THE EXTENSION STEM
3. EXTENSION STEM SHALL BE OF SOLID DESIGN, NO PINNED COUPLINGS PERMITTED
4. EXTENSION STEM SHALL NOT BE ATTACHED TO THE OPERATING NUT OF THE VALVE
5. ALL MATERIALS SHALL BE NEW

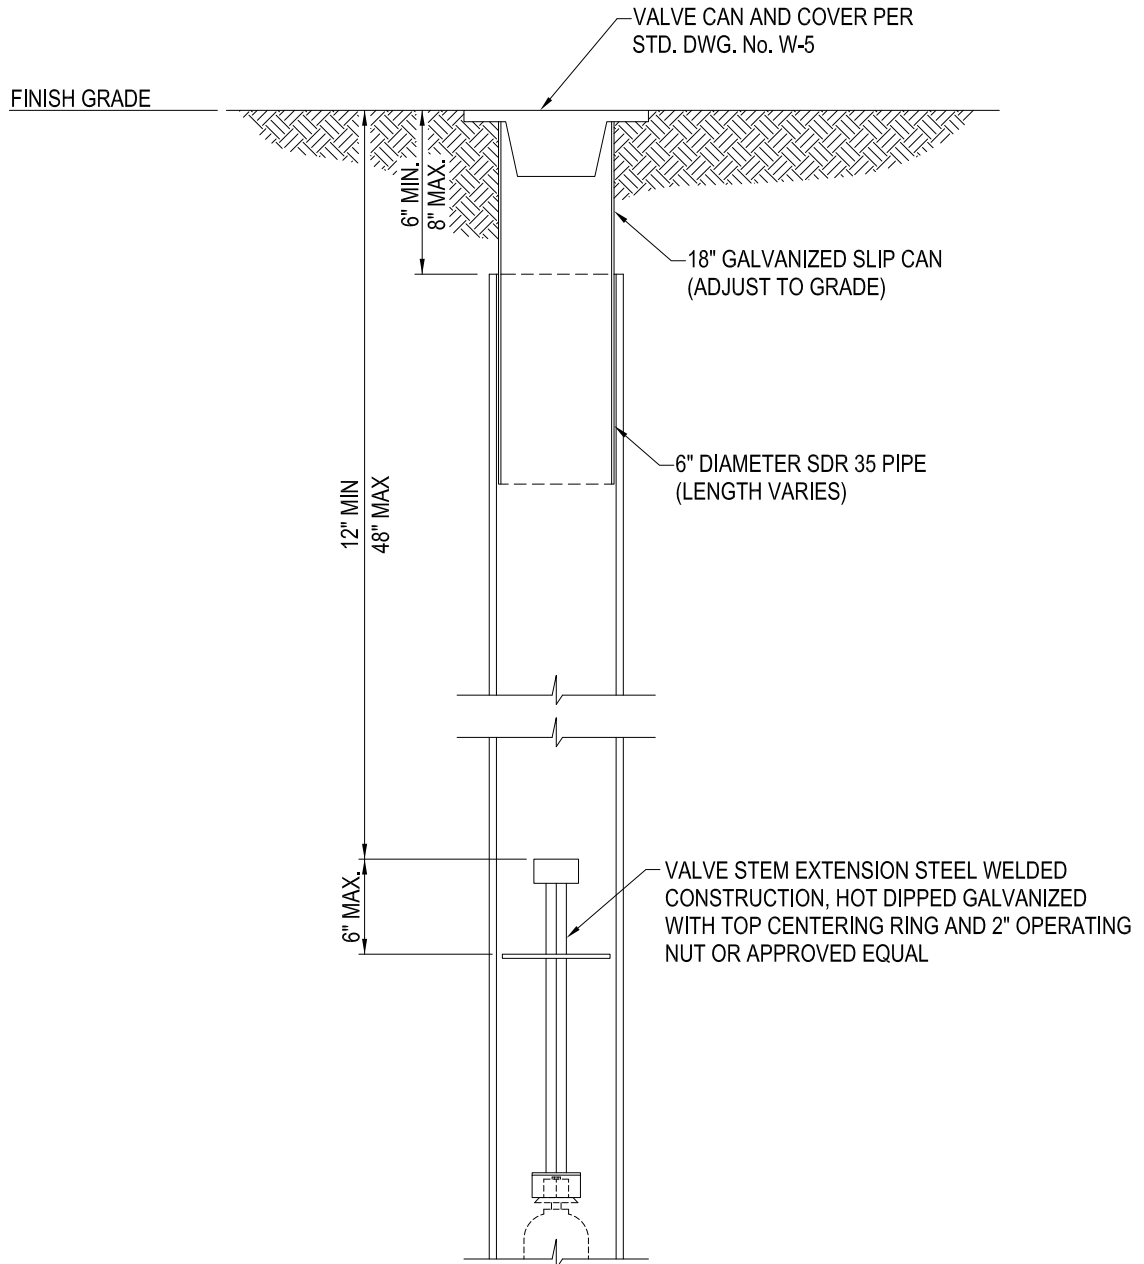

Revised: April 22, 2020

RECOMMENDED BY:	REV.	DATE	BY
Engineering			
APPROVED BY:			
Operations			

PHELAN PIÑON HILLS
COMMUNITY SERVICES DISTRICT
VALVE OPERATOR EXTENSION



STD. DWG. No.
W-6